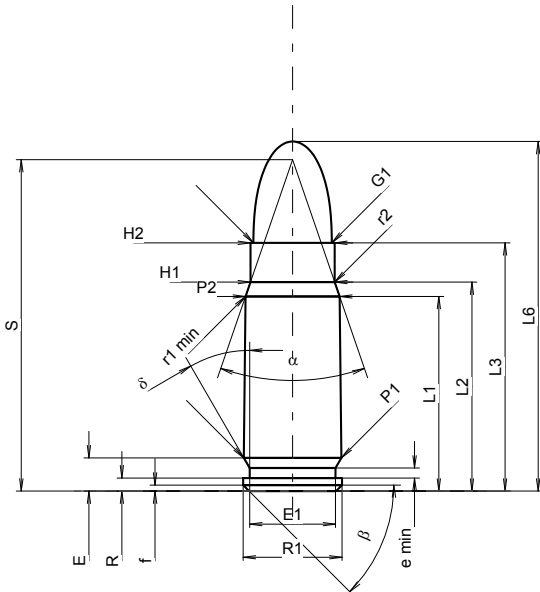
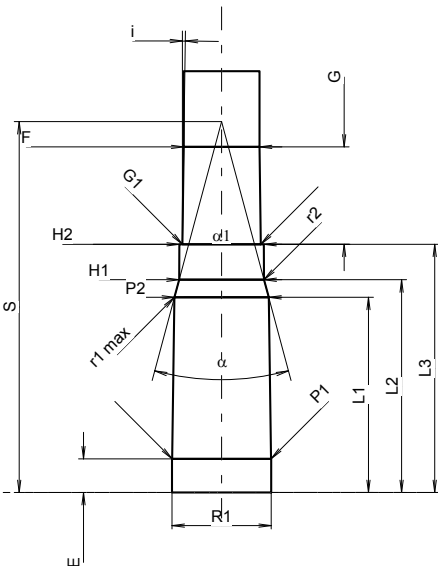


C.I.P.	7,62 x 25 Tokarev	TAB.	IV
		Date	90-04-04
		Revision	06-09-19
Country of Origin: SU			
	CARTRIDGE MAXI	CHAMBER MINI	
	Lengths L1 ^{1)*} = 19.60 -0.20 L2 ^{1)*} = 21.04 -0.20 L3 ¹⁾ = 25.00 L4 = L5 = L6 = 35.20 Case Head R = 1.32 R1 = 9.95 R3 = E = 3.34 E1 = 8.65 e min = 1.00 δ = 30° f = 0.60 β = 45° Powder Chamber P1 = 9.83 P2 ^{1)*} = 9.48 -0.20 Junction Cone α = 38° S = 33.37 r1 min = 0.50 r2 = 2.00 Collar H1 * = 8.49 H2 ¹⁾ = 8.49 Projectile G1 ¹⁾ = 7.90 G2 = F = L3+G ¹⁾ = 34.80 Pressures (Energies) Method Transducer Pmax = 2500 bar PK = 2875 bar PE = 3250 bar M = 17.50 Miscellaneous Dimensions Fe ¹⁾³⁾ = 0.20 delta L =	Lengths L1 * = 19.65 L2 * = 21.42 L3 ¹⁾ = 25.00 Breech R = 1.40 R1 = 10.00 R2 = R3 = r = Powder Chamber E = 3.40 P1 ¹⁾ = 9.95 P2 * = 9.50 Junction Cone α ¹⁾ = 30°02'38" S = 37.35 r1 max = 0.50 r2 = 1.00 Collar H1 * = 8.55 H2 ¹⁾ = 8.50 Commencement of Rifling G1 ^{1)*} = 7.90 G ^{1)*} = 9.80 α1 = 180° h = s = i ¹⁾ = 0°49'6" w = Barrel F ^{1)*} = 7.62 Z ¹⁾ = 7.92 Grooves b = 3.81 N = 4 u = 240.00 Q = 47.99 mm ²	
			
Scale 1.31:1			
Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 1.	Notes: 1) Check for safety reasons 3) Headspace on Shoulder * Basic dimensions		